

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 September 2005 (15.09.2005)

PCT

(10) International Publication Number
WO 2005/084920 A1

(51) International Patent Classification⁷: **B29C 49/48**

(21) International Application Number:
PCT/EP2005/002269

(22) International Filing Date: 2 March 2005 (02.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0404689.2 3 March 2004 (03.03.2004) GB
60/549,463 3 March 2004 (03.03.2004) US

(71) Applicant and

(72) Inventor: **SIDERIS, Constantinos** [CY/CY]; 17 Arsakelou Str., 2045 Strovolos, Nicosia (CY).

(74) Agents: **NEWELL, W., J.** et al.; Wynne-Jones, Laine & James, 22 Rodney Road, Cheltenham, Gloucestershire, GL50 1JJ (GB).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: **MOULDING OF PLASTICS ARTICLES**

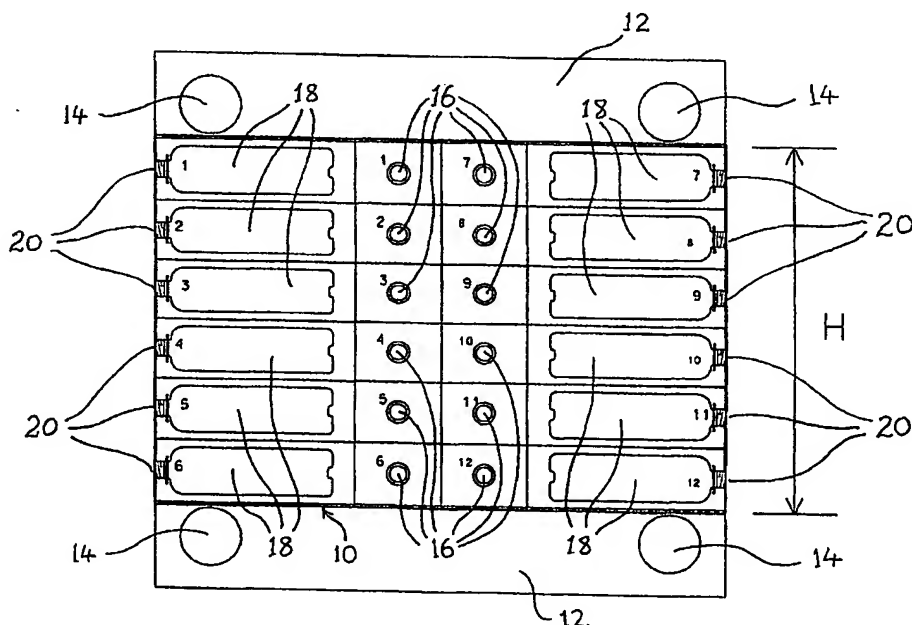

(57) Abstract: A composite mould set for use on a conventional type of injection-moulding machine is made up of composite mould halves (10) which are mounted one on each platen (12) of the injection moulding machine. Each mould half (10) carries an array of injection moulding cavities (16) for moulding preforms, and an array of blow moulding cavities (18) for stretch blow moulding of the preforms into a blow moulded product. The respective cavities (16) and (18) are arranged so that they open in a common mould separation direction.

WO 2005/084920 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.